


In order to help prevent the impact of seasonal movement on your foundations, we recommend that your foundations extend a minimum of 200mm into the ground. The depth of your footings will depend on the loads placed on the EasyPads and the ability of the ground to bear this load. The higher the load the bigger the footing. The poorer the ground conditions the wider and deeper the footings.


The pads can sit on top of MOT or DOT compacted hard core.

The EasyPads can be inserted into the ground or they can be surface mounted.


200mm deep with 40mm hard core

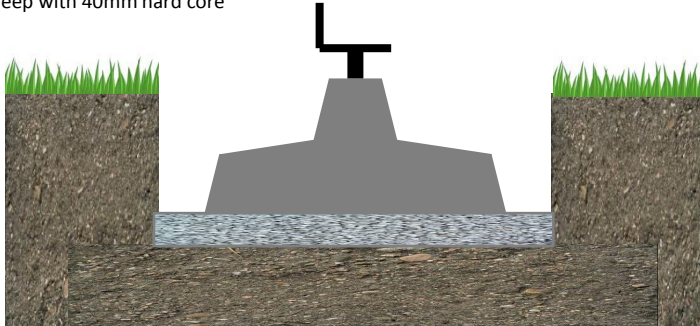


Slightly raised above ground level

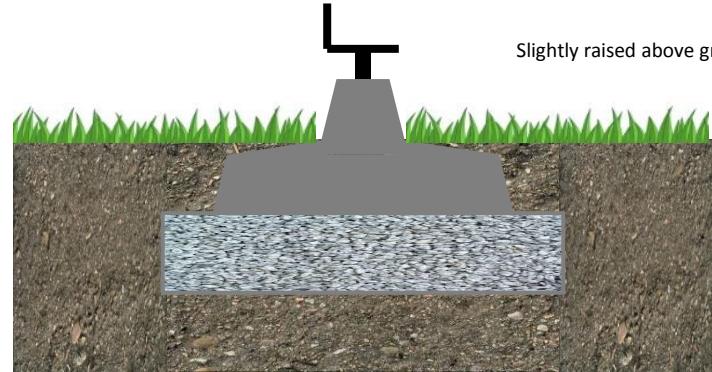

Surface mounted pads

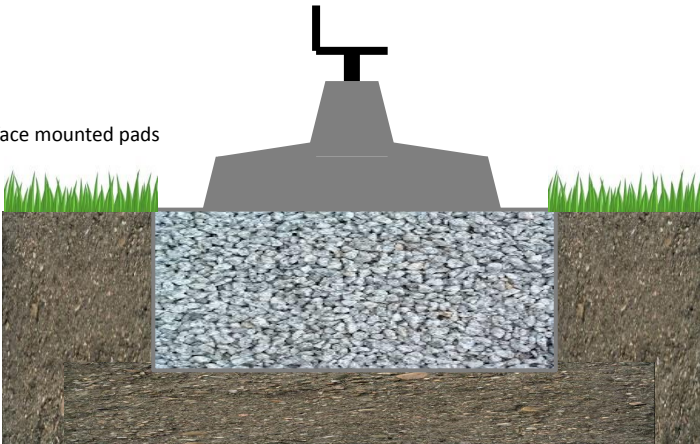

Bracket at ground level

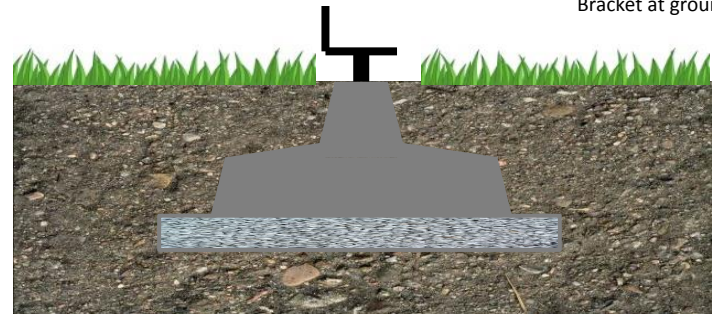

Clients are responsible for assessing their site ground conditions